## NAGARI GRAM PANCHAYAT

PATHRA:BIRBHUM

Mail ID - pradhan.nagarigp@gmail.com

Contact: 9732249913

## e-Tender, NIT No-04 /NGP 2022, Dated-15/07/2022

Percentage rate e-tenders for the under mention works are invited from the experienced and resourceful bidders for execution of the works. The intending tenders should download the detailed tender notice along with tender documents from link https://wbtenders.gov.in. The tenders will have to submit their bid online in two folder system containing pre-qualification documents (Technical Bid) in one and (Financial bid) in another.

## Details of work.

| S.I.<br>no | Name of Work  | Name of<br>Fund    | Amount put to tender(Rs) | Earnest<br>Money<br>(Rs) | Cost of<br>Tender Paper<br>(Rs) | Valid<br>perio<br>d | Draft in<br>favour of            | Executing<br>Agency GP           |
|------------|---|--------------------|--------------------------|--------------------------|---------------------------------|---------------------|----------------------------------|----------------------------------|
| 1          | Construction of Concrete road from pitch road towards Jamdohi | 15th CFC<br>UNTIED | 200000.00                | 4000.00                  | 250.00                          | 30 days             | Prodhan,Nagari<br>Gram Panchayet | Prodhan,Nagari Gram<br>Panchayet |

E-Tender may be accepted through portal up to 12.00 pm on 28/07/2022, Date & time of opening Technical Bid 01/08/2022 at 11.00 am

Date & time of opening Financial Bid 01/08/2022 at 2.00 pm at the office of the Nagari Gram Panchayet. (Following documents should be uploaded as eligibility criteria)

- 1) Pan card
- 2) IT return last thre year
- 3) Professional Tax enrollment certificate
- 4) G.S.T registration certificate
- 5) Credential certificate within the last five year.
- 6. Trade Registration Certificate (2022-23)

Pathra (Suri-I) Birbhum

Memo no:- 447 / NGP / 2022

15/07/2022 Date:-

Copy forwared for information and with a request for wide publicity to:-

1. A.E.O. Birbhum Zilla Parishad Suri, Birbhum

- 2) The Sub- Divisional Officer, Suri Sadar Dist-Birbhum.
- 3) The BDO of Suri -I Dev. Block.
- 4) Office Notice Board, Nagari GP.


Nagari Gram Panchayat Pathra (Suri-I) Birbhum



## Estimate for construction of **CONCRETE ROAD WORK** from Pitch Road towards Jamdohi of Nagari G.P. (2021-22, SI-24) under SURI-I DEV. BLOCK.

| -   | TOTAL LENG   | 67.5  | METRE                    |   |       |          |                   |                | -       |                               |
|---|--|-------|--------------------------|---|-------|----------|-------------------|----------------|---------|-------------------------------|
| TOTAL WIDTH =   |  |       | 2.5                      | METRE                                   |       |          |                   |                | FUND -  | 15 <sup>th</sup> FC<br>UNTIED |
| THICKNESS OF PAVEMENT CONCRETE (1:2:4) 0.15               |  |       | METRE                    | WIDTH OF BOTH SIDE EARTHEN SHOULDER     |       |          |                   |                | 0.4     | METRE                         |
| TH. OF SOLING (S.B.F.) BELOW PAVEMENT CONC. (1:2:4) 0.075 |  |       | METRE                    | THICKNESS OF BOTH SIDE EARTHEN SHOULDER |       |          |                   |                | 0.2     | METRE                         |
| TH. OF SAND BELOW SOLING 0.075                            |  | METRE | N.I.T. :- 01/2022-23 SEI |   |       |          | SER               | NO.:-          | 1       |                               |
| TH. OF SAND BELOVY SOLING 0.075                           |  |       |                          |   |       |          |                   | я              |         |                               |
| SI.<br>No.  | Description of Item  | No    | L                        | В                                       | Н     | Quantity | Total<br>Quantity | Unit           | Rate    | Amount                        |
| 1   | Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the flank as necessary or on berm to approximate grade & camber and rolling the sub-grade with power roller to proper camber and grade as per direction and satisfaction of Engineer-in charge including uprooting and removing plants and jungles when and where necessary.  Depth of excavation up to 150mm. | 1     | 67.5                     | 2.5                                     |       | 168.75   | 168.750           | m²             | 14.4    | 2430.00                       |
| 2   | Earth work in filling with earth obtained from excavation of foundation trenches   | 2     | 67.5                     | 0.4                                     | 0.2   | 10.8     | 10.800            | m <sup>3</sup> | 77.54   | 837.00                        |
| 3   | Filling in foundation or plinth by fine river sand in layers not exceeding 150 mm as directed and consolidating same by thorough saturation with water 8 ramming complete, including the cost of supply of sand. (Payment to be made on measurement of finished quantity) as per direction of E.I.C.   | 1     | 67.5                     | 2.5                                     | 0.075 | 12.65625 | 12.656            | m <sup>3</sup> | 572.55  | 7246.00                       |
| 4   | Single brick flat soling with 1st class kiln burnt bricks /size picked jhama bricks including ramming and dressing bed to proper level and filling joints with powdered earth or local sand etc all complete as per drawing & direction of E.I.C.  |       | 67.5                     | 2.5                                     |       | 168.75   | 168.750           | m <sup>2</sup> | 266     | 44888.00                      |
| 5   | Supplying and Laying Polythene Sheet (150gm / sq m.) below concrete works for Pavement concrete.   |       | 67.5                     | 2.5                                     |       | 168.75   | 168.750           | m <sup>2</sup> | 24      | 4050.00                       |
| 6   | Nominal mix Cement concrete of proportion 1:2:4 with graded trap stone chips (20 mm.nominal size) excluding shuttering and reinforcement, if any, in ground floor as per relevant IS codes & direction of E.I.C.   | 1     | 67.5                     | 2.5                                     | 0.15  | 25.3125  | 25.313            | m <sup>3</sup> | 4475.82 | 113294.00                     |

|                               |  |   |      |      |      |       |        |                | •         |         |
|-------------------------------|--|---|------|------|------|-------|--------|----------------|-----------|---------|
|                               | and labour charges for side<br>luttering for concrete work with thick<br>hard wood planks of approved thickness<br>for side shuttering of concrete as per<br>direction of E.I.C.<br>for out side   | 2 | 67.5 |      | 0.15 | 20.25 | 20.250 | m <sup>2</sup> | 93        | 1883.00 |
| 8                             | Supplying and fixing Thermocol for expansion joints in proper position.  | 5 | 2.5  | 0.15 |      | 1.875 | 1.875  | m²             | 66        | 124.00  |
| 9                             | Display board making with bi-colour oil bound synthetic enamel paints over primer on walls nearer to construction site of size 900mm x 600mm & supply 6 nos colour photographs of (3) three stages (i.e. before, after & at the time of construction) atleast 2nos photos on each stage etc. all complete as per direction of E.I.C. |   |      |      |      |       |        |                | L.S.      | 500.00  |
|                               | TOTAL = Rs.  |   |      |      |      |       |        |                |           |         |
| GST @ 12% = Rs                |  |   |      |      |      |       |        |                | 21030.00  |         |
| TOTAL = Rs.                   |  |   |      |      |      |       |        |                | 196282.00 |         |
| Cess @ 1% = Rs.               |  |   |      |      |      |       |        |                | 1963.00   |         |
| TOTAL = Rs.                   |  |   |      |      |      |       |        |                | 198245.00 |         |
| CONTINGENCIES WITHIN 3% = Rs. |  |   |      |      |      |       |        |                | 3% = Rs.  | 1755.00 |
| GRAND TOTAL = Rs.             |  |   |      |      |      |       |        | 200000.00      |           |         |

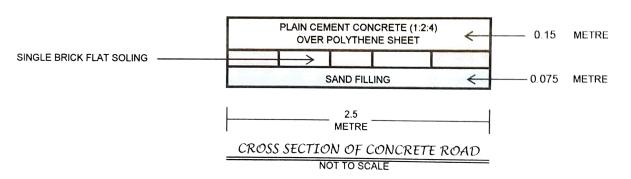

Estimated By :-

Wilman Sahayek Negari Grannanga

Prodhall

Pradhan Nagari Gram Panchayat Pathra (Suri-1) Birbhum